





Manufactured by
Superior
with
Solids
SWR

SolidFlow 2.0

**Solids Flow Measurement
for dilute-phase conveying and freefall conditions**

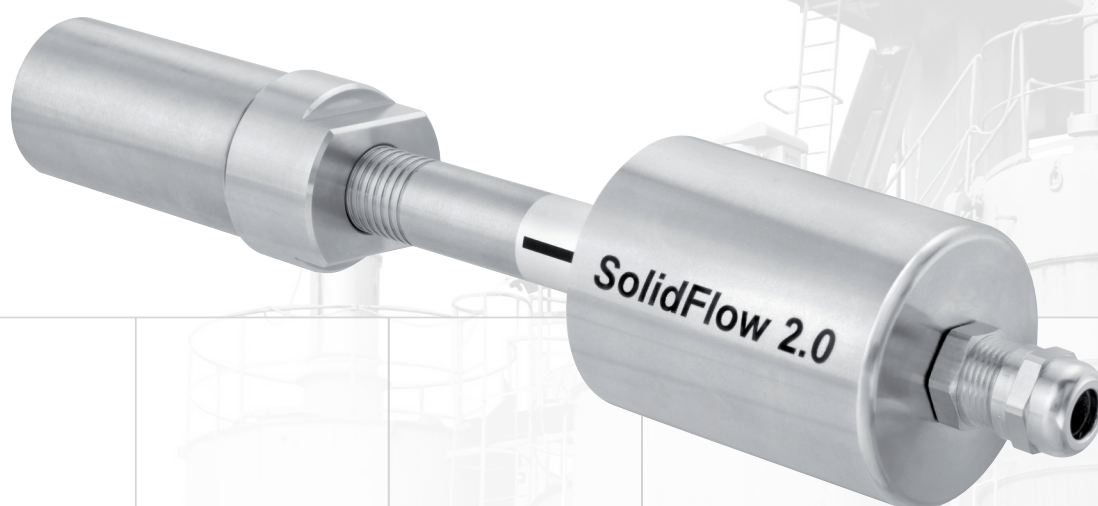

Use

SolidFlow 2.0 has been specifically developed for measuring solids mass flow conveyed through pipelines.

SolidFlow 2.0 is used for online measuring:

- all types of dust, powder, granulates, etc.
- with particle sizes between 2500 Mesh ... 1 inch
- of pneumatically conveyed (dilute-phase) product
- of product in free fall

SolidFlow 2.0 is extremely easy to install and has a wear-resistant design.

SolidFlow 2.0 is the latest generation of microwave-based measuring systems for measuring the flow of solids. Based on many years of expertise, SWR has developed a second generation sensor with an extremely fast microprocessor which enables x100 more samples per second.

SolidFlow 2.0 is a reliable sensor which eliminates the disadvantages in current technologies available on the market. (weigh feeders, impact meters, & volumetric feeders)

These old technologies can require monthly maintenance and calibration to overcome mechanical wear, load cell drift, product build-up, vibration and environmental conditions. The microwave sensor has none of these issues.

Function

The SolidFlow 2.0 sensor uses the latest microwave technology and is used typically in metal pipelines. The special integration of microwave technology creates the measurement field inside the metal pipe. The microwave field in the pipe is reflected by the solid particles and received by the sensor. The frequency and amplitude of the received signals are analyzed.




The sensor works like a particle counter, counting the quantity of flowing particles per unit of time.

The frequency-selected evaluation system ensures that only flowing particles are measured while deposits are suppressed.

SolidFlow 2.0 features active stratification compensation which compensates measurement errors caused by roping, in particular while materials are being pneumatically conveyed.

Based on new processing technology, the measurement signal is converted into its frequency spectrum which is used to detect the material's flow pattern. The sensor is calibrated during installation by entering the reference quantity and pressing a button.

The illustrations show two frequency spectra for different flow conditions with similar mass flows. A software algorithm ensures that the measuring result is correct even with different flow conditions.

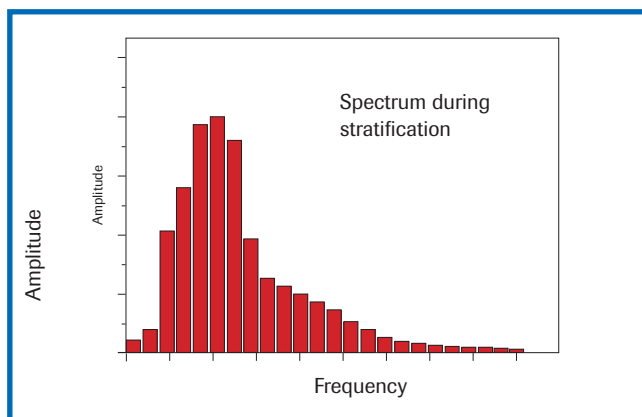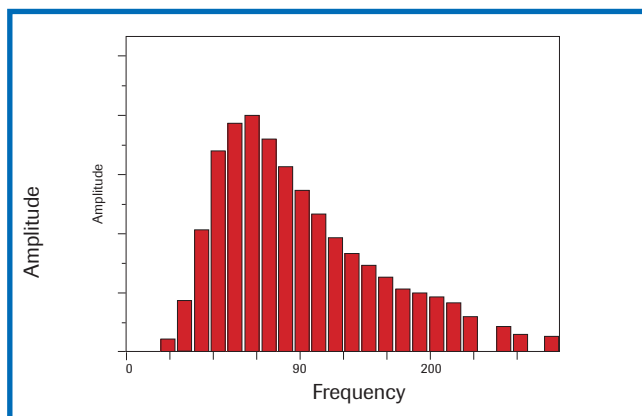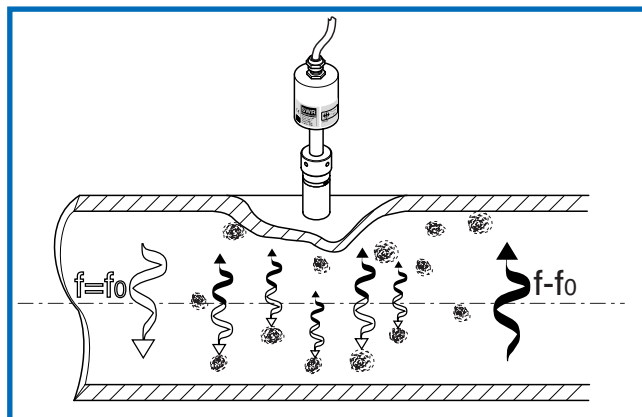


System

A complete measuring point consists of the following components:

- Socket for mounting the sensor, including a plug
- FMS sensor with a 6.5 foot-connecting cable
- C-Box for connecting the sensor and transmitter
- FME transmitter with a 4-20mA output

The transmitter is available as a field enclosure with touch panel control and display, or in a DIN-rail version. With the DIN-rail version, software is supplied for parametrization purposes.

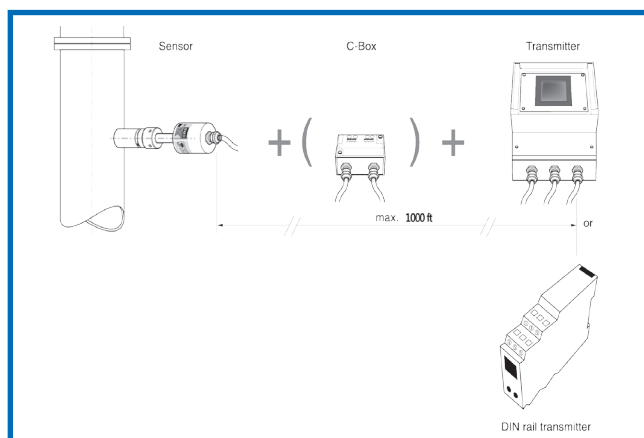


Applications – Practical Examples

Compounding plant

Mixtures are created using the sandwich technique with a weighing container. The existing weighing device was not designed for dosing small quantities of additional components, which meant that measured doses could not be reproduced.

Benefits:

SolidFlow 2.0 enables the dosing of additional components to be reproduced and better balancing of the quantities used.

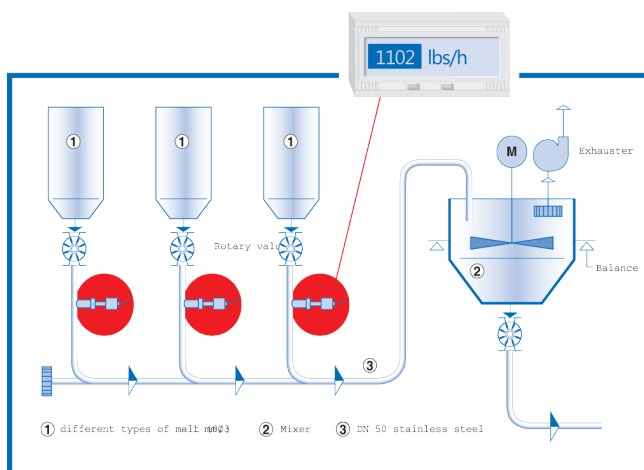


Fuel delivery

In a boiler, dust is conveyed as fuel to the combustion chamber. As there is no information about the distribution of fuel quantities in the different supply lines, setting optimum combustion is not always possible.

Benefits:

Each supply line is monitored by a SolidFlow 2.0 system, and the supply of fuel quantities is regulated in each individual supply line. This enables accurate and uniform distribution of fuel quantities which is an essential requirement for optimum combustion.

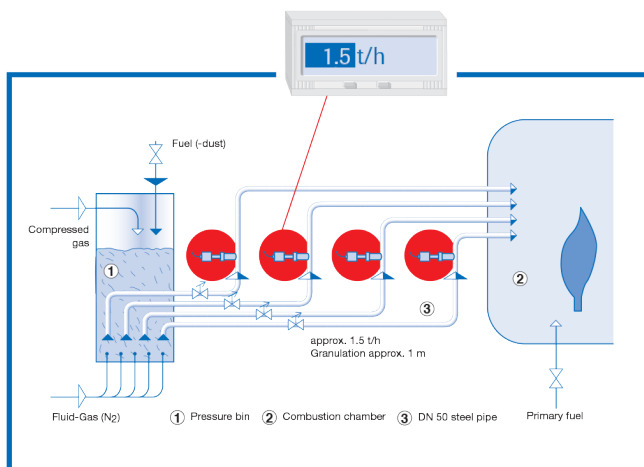

Quantity balancing


The supply of materials to the grinding system is subject to significant fluctuations.

Benefits:

With SolidFlow 2.0, the progress of the mass flow can be measured and documented.

If necessary, adjustments can be made.

By measuring the coarse grain between the grinding system and the mill, the grinding quality can also be monitored.

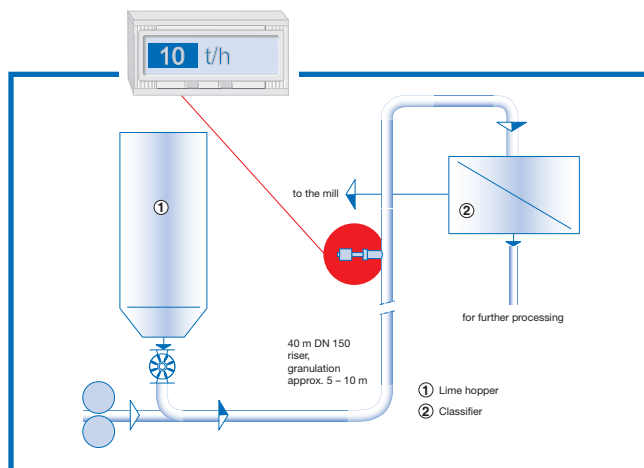

Free-fall application


A belt weigher measures the amount of cement conveyed. This measurement is used as a guide value when metering the addition of iron(II) sulphate.

This must be metered with a proportion of 0.2 ... 0.3 %.

Benefits:

With SolidFlow 2.0, the actual value of the metered iron(II) sulphate is recorded and regulated by adjusting the screw conveyor's speed.

The result is uniform product quality.

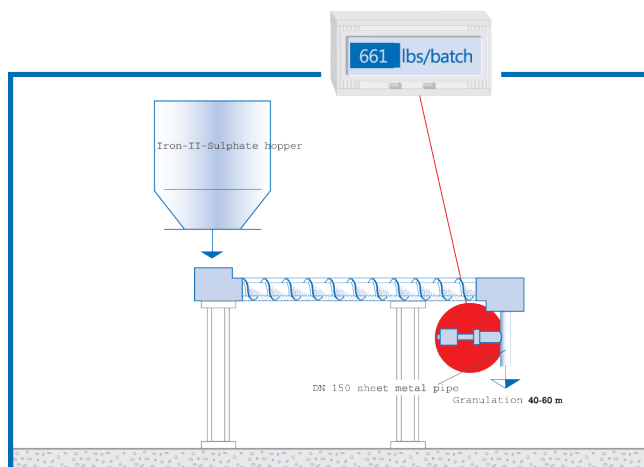


Granulate dosing system

The existing dosing tank is too inaccurate and means that the plant can only operate intermittently.

Benefits:

SolidFlow 2.0 enables transparent monitoring of the conveyed quantities and the process can be turned into one continuous operation.

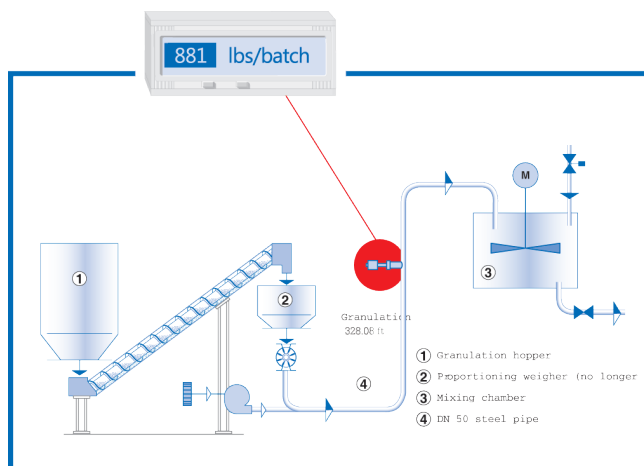






Mounting and installation

To install the sensor, the installation location must be determined according to the required inlet and outlet areas. With pipe diameters larger than 8", 2 or 3 sensors are used per measuring point and the sensors are arranged at angles of 90° or 120° to each other.

In free-fall applications (for example after screw conveyors or rotary feeders), an infed section (drop height) of at least 12" is ideal.

The sensor socket is welded on at the specified installation location. After this, a 20mm borehole is drilled through the sensor socket and through the pipe wall.

The sensor is then adjusted to the wall thickness, inserted and fixed with the aid of union nuts. Done!

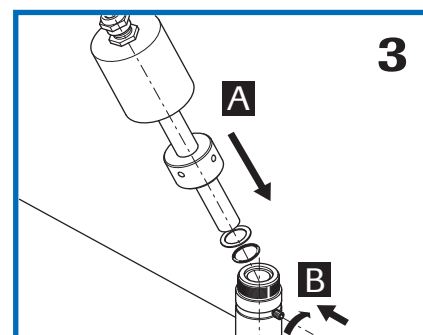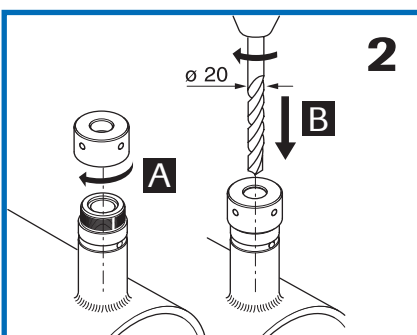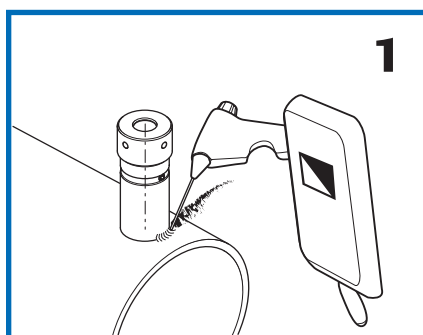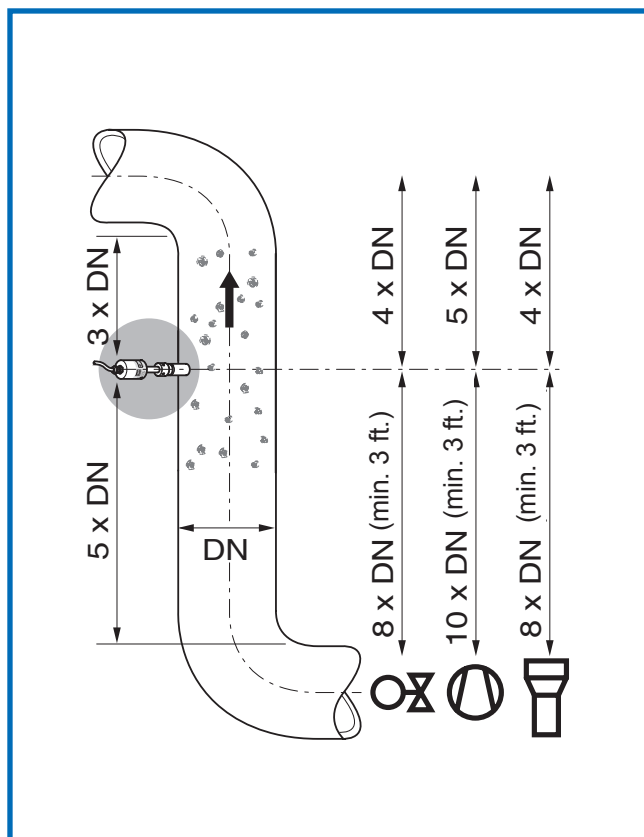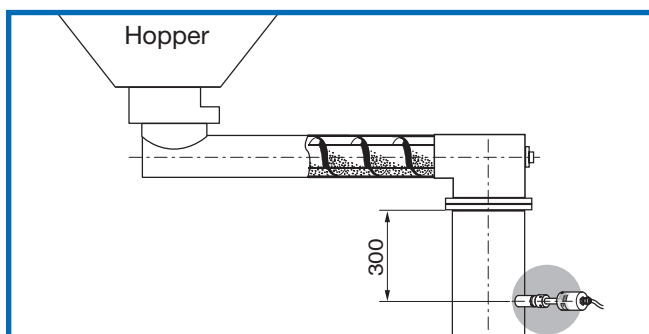

Commissioning

The measuring device is started up by the FME transmitter. This electronic unit enables convenient menu-guided input of parameters such as measuring range, required physical units or measuring signal attenuation.

The available outputs are a 4-20 mA, Modbus RTU and a pulse output (open collector).

The integrated total counter enables easy calibration.

The menu language options are German, English or French. When using DIN-rail transmitter, the system is operated via the supplied software.



Technical data

Sensor	
Housing	Stainless steel 1.4571
Protection category	NEMA 4X (IP65), DustEx zone 20 or GasEx zone 1 (optional)
Operating temperature	Front end of sensor: -4 ... +176 °F Optional (HT Sensor): -4 ... +392 °F Optional (HT Socket): -4 ... +900 °F Sensor electronic: 0 ... +140 °F
Max. working pressure	1 bar, optional 10 bar
Working frequency	K-Band 24.125 GHz, ± 100 MHz
Transmitting power	Max. 5 mW
Weight	2.86 lbs
Dimensions	$\varnothing 60$, $\varnothing 20$, L 271 mm Optional: $\varnothing 60$, $\varnothing 20$, L 500 mm
Accuracy	$\pm 2 \dots 5$ % in calibrated range

Field housing transmitter	
Power supply	110/230 V, 50 Hz (optional 24 V DC)
Power consumption	20 W / 24 VA
Current consumption	Max. 1 A at 24 V
Protection category	NEMA 4X (IP65) to EN 60 529/10.91
Operating temperature	14 ... +113 °F
Dimensions	258 x 237 x 174 mm (W x H x D)
Weight	Approx. 5.5 lbs
Interface	RS 485 (ModBus RTU), USB-Bus
Cable glands	3 x M16 (0.177 - .393 in \varnothing)
Screw terminals section	0.007-0.098 in ² [AWG 24-14]
Current output signal	4-20 mA (0-20 mA), load < 500 Ω
Measurement value alarm relay output	Relay with switching contact Max. 250 V AC at 1 A
Data storage	Flash memory
Pulse output	Open Collector - max. 30 V, .02 A

C-Box	
Size	3.85 x 2.51 x 1.37 in (W x H x D)

